


## SINGLE CORE (CLASS 2) UNSHEATHED BUILDING WIRE 450/750V (LSZH INSULATED)

<b>Application</b>	: Can be Used in Common Wiring, Industrial Wiring Conduit , Protected Installation in Switchgear, Lighting and Appliances, Where Low Smoke and Reduced/Toxic Gas Emission during Combustion are Critical.
<b>Standards</b>	: BS EN 50525-3-41 (H07Z-R)
<b>Conductor</b>	: Stranded (Class 2) Annealed Plain Copper Conductors to EN 60228
<b>Insulation</b>	: LSZH Type EI-5 as per EN 50363-5
<b>Insulation Colour</b>	: Red, Yellow, Blue, Black, Green / Yellow & Other Colour Available as per Requirement
<b>Voltage Rating</b>	: 450/750 V
<b>Max. Permissible</b>	: During Normal Operation - 90°C
<b>Conductor Temperature</b>	: During Short Circuit Condition - 160°C
<b>Flame Retardant</b>	: IEC 60332-1-2
<b>Halogen Acid Gas Emission</b>	: Max. 0.5% (IEC 60754-1)

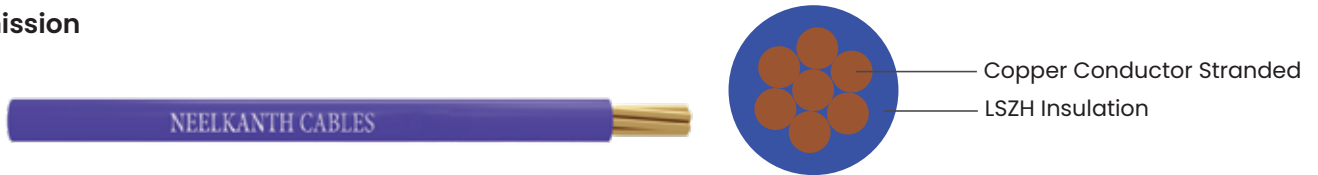

### XL-LSZH Insulated Non Sheathed Single Core Cables, Rated Voltage 450/750V

Catalogue Number	Nominal Cross Section Area	Nominal Insulation Thickness	Approx. Overall Diameter	Current Rating in Air	Maximum DC Resistance at 20°C	Minimum Insulation Resistance at rated temperature	Approx. Weight of Finished Cable
	SQ.MM	MM	MM	Ampere(A)	Ohm/Km	MΩ-km	Kg/Km
NBW*CZSC0015ST07	1.5	0.7	3.0	22	12.1	0.010	22
NBW*CZSC0025ST07	2.5	0.8	3.6	30	7.41	0.009	33
NBW*CZSC0040ST07	4.0	0.8	4.2	40	4.61	0.0077	52
NBW*CZSC0060ST07	6.0	0.8	4.8	51	3.08	0.0065	72

**Notes:** N(\*) Add Core Colour

Cables can be supplied in Coil/Reel/Drum with meters/yards/feet.

The above data is indicative & may be changed without prior information.